


WATER TEMP SENSOR 12MM THREAD GENUINE DELCO WTS-002-OEM-LZ11


Calibration
25c=2.830ohms
Connector
CON-GM-WT2F-LH09

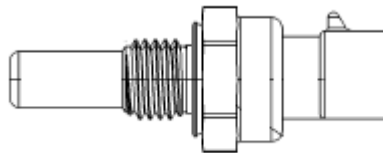

Unloaded Resistance-Temperature Characteristic Table

Temp (°C)	R(Ω)*	R (±%)	Ref. Acc. (±°C)	Temp (°C)	R(Ω)*	R (±%)	Ref. Acc. (±°C)	Temp (°C)	R(Ω)*	R (±%)	Ref. Acc. (±°C)
-40	102,122	5.18	0.8	25	2,830	3.53	0.8	90	244.8	2.46	0.8
-35	73,340	5.03	0.8	30	2,268	3.44	0.8	95	209.7	2.39	0.8
-30	53,249	4.87	0.8	35	1,828	3.34	0.8	100	180.2	2.32	0.8
-25	39,064	4.72	0.8	40	1,483	3.25	0.8	105	155.6	2.24	0.8
-20	28,939	4.58	0.8	45	1,210	3.16	0.8	110	134.7	2.17	0.8
-15	21,637	4.44	0.8	50	992.5	3.07	0.8	115	117.1	2.11	0.8
-10	16,321	4.30	0.8	55	818.9	2.98	0.8	120	102.2	2.06	0.8
-5	12,413	4.16	0.8	60	679.3	2.90	0.8	125	89.42	2.02	0.8
0	9,516	4.02	0.8	65	566.4	2.83	0.8	130	78.51	2.06	0.8
5	7,354	3.92	0.8	70	474.6	2.75	0.8	135	69.14	2.20	0.9
10	5,728	3.82	0.8	75	399.6	2.67	0.8	140	61.07	2.34	1.0
15	4,496	3.72	0.8	80	337.9	2.60	0.8	145	54.10	2.48	1.0
20	3,555	3.63	0.8	85	287.0	2.53	0.8	150	48.06	2.63	1.1

Wiring Details

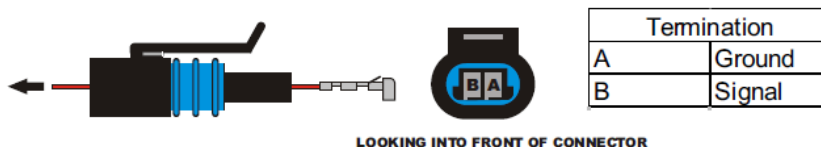

LOOKING INTO FRONT OF CONNECTOR

INSERT WIRE THROUGH PLUG, THEN CRIMP THE PIN ONTO THE WIRE
DRAW BACK TO LOCK