


WATER TEMP SENSOR 3/8 LARGE THREAD

DELCO COPY

WTS-001-SRS-LC12

Calibration
 25c = 2.830ohms
 Connector
 CON-GM-WT2F-LH09

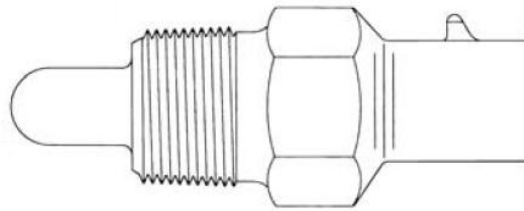

Unloaded Resistance-Temperature Characteristic Table

Temp (°C)	R(Ω)*	R (±%)	Ref. Acc. (±°C)	Temp (°C)	R(Ω)*	R (±%)	Ref. Acc. (±°C)	Temp (°C)	R(Ω)*	R (±%)	Ref. Acc. (±°C)
-40	102,122	5.18	0.8	25	2,830	3.53	0.8	90	244.8	2.46	0.8
-35	73,340	5.03	0.8	30	2,268	3.44	0.8	95	209.7	2.39	0.8
-30	53,249	4.87	0.8	35	1,828	3.34	0.8	100	180.2	2.32	0.8
-25	39,064	4.72	0.8	40	1,483	3.25	0.8	105	155.6	2.24	0.8
-20	28,939	4.58	0.8	45	1,210	3.16	0.8	110	134.7	2.17	0.8
-15	21,637	4.44	0.8	50	992.5	3.07	0.8	115	117.1	2.11	0.8
-10	16,321	4.30	0.8	55	818.9	2.98	0.8	120	102.2	2.06	0.8
-5	12,413	4.16	0.8	60	679.3	2.90	0.8	125	89.42	2.02	0.8
0	9,516	4.02	0.8	65	566.4	2.83	0.8	130	78.51	2.06	0.8
5	7,354	3.92	0.8	70	474.6	2.75	0.8	135	69.14	2.20	0.9
10	5,728	3.82	0.8	75	399.6	2.67	0.8	140	61.07	2.34	1.0
15	4,496	3.72	0.8	80	337.9	2.60	0.8	145	54.10	2.48	1.0
20	3,555	3.63	0.8	85	287.0	2.53	0.8	150	48.06	2.63	1.1

Wiring Details



Termination	
A	Ground
B	Signal

LOOKING INTO FRONT OF CONNECTOR

INSERT WIRE THROUGH PLUG, THEN CRIMP THE PIN ONTO THE WIRE
 DRAW BACK TO LOCK